

Universal Bulkhead Module UBM-I™ Interconnect Modules

Features


- 2-4-8 Port Variants
- Ultra-Compact Form Factor
- Integrated Mounting Solution
- I-Temp: -40 ~ 85 °C
- Telcordia GR-1209, GR-1221, GR-20 compliant
- RoHS compliant

Deployment

- Telco and MSO Networks
- Pedestal, Cabinet, Splice Enclosure, MDU
- Splice in SC/APC Anywhere
- FTTX Telco and MSO Networks

Overview


The patent pending Plugin Optics UBM-I™ “Universal Bulkhead Module” Interconnect Series allows you to add a sealed compact interconnect point to splice enclosures, pedestals, and cabinets. These compact modules come with a 1.5-meter, 250-micron, fiber cable that can be spliced to the outside plant fibers to give the drop cable flexibility at any point.

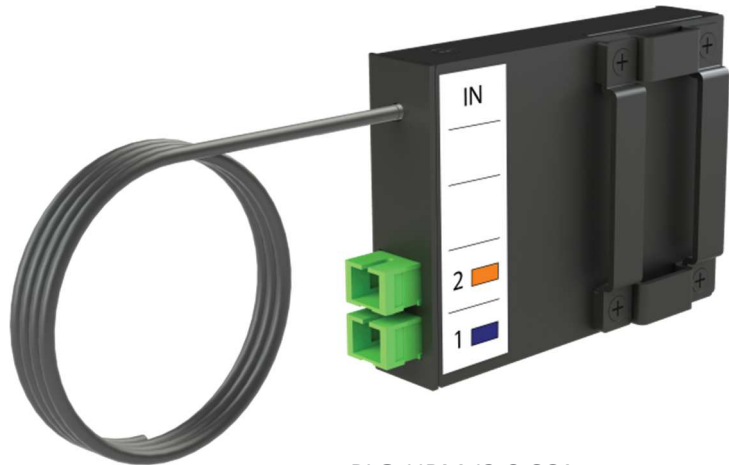

PLO-UBM-I2-0-SCA



PLO-UBM-I4-0-SCA

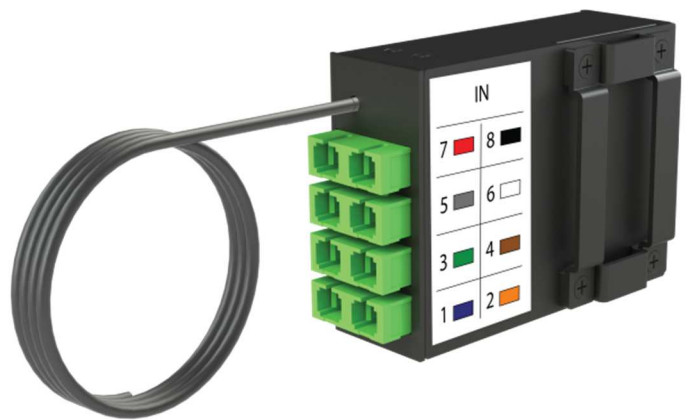

PLO-UBM-I8-0-SCA



Technical Specifications			
Parameters	UBM-I2	UBM-I4	UBM-I8
Dimensions LxWxH (mm)	95x70x26	95x70x26	95x70x38
Operating Wavelength (nm)	1250 ~ 1650		
Insertion Loss (dB)	0.3		
Fiber Type	G.657A1		
Fiber Length (m) - IN Port	1.5		
Connector Type – Out Ports	SC/APC		
Wavelength Dependent Loss (dB)	≤0.3		
Operating Temperature (°C)	-40 ~ 85		
Storage Temperature (°C)	-40 ~ 85		
Ordering Information			
Part Number	Description		
PLO-UBM-I2-0-SCA	2 Port, Universal Bulkhead Module Interconnect, Bare Fiber Input, SC/APC Out		
PLO-UBM-I4-0-SCA	4 Port, Universal Bulkhead Module Interconnect, Bare Fiber Input, SC/APC Out		
PLO-UBM-I8-0-SCA	8 Port, Universal Bulkhead Module Interconnect, Bare Fiber Input, SC/APC Out		