


## PLO-U-MMPED-KIT

### ADJUSTABLE 2-POST PEDESTAL BRACKET KIT FOR MAG MOUNT

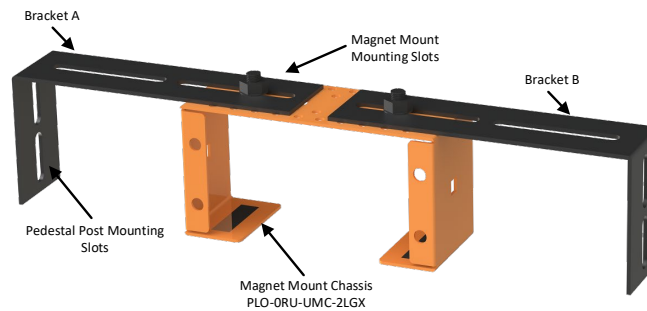

### PEDESTAL BRACKET KIT

The Plugin Optics Pedestal Mounting Bracket Kit was designed to facilitate the mounting of magnet mount chassis (part number PLO-0RU-UMC-2LGX) into most 2-post pedestals. This kit contains two mounting brackets, all the hardware you need and is adjustable from 8-inches to 14-inches. Once installed, additional magnet mount chassis can be added using the magnets to attach additional magnet mount chassis where applicable.

#### Kit Includes

- Qty 2, "L Brackets"
- Qty 4, Panhead Carriage Bolts, M6 x .5-Inch
- Qty 4, Panhead Carriage Bolts, M6 x 1-Inch
- Qty 8, Hex Bolts, M6
- Qty 8, Flat Washers, M6



While designed for 2-post pedestal installation this bracket can also be installed on customer site wallboards, cell site access cabinets, network racks or anywhere LGX solutions are needed. LGX solutions can include CWDM, DWDM, bulkhead adapters for fiber distribution, and splice-in pigtailed LGX solutions.

### INSTALLATION

The following instructions are meant to act as guidelines only. Please observe all company safety and installation procedures when completing the installation.

#### MAGNET MOUNT INSTALLATION

- Begin the installation of PLO-U-MMPED-KIT by loosely attaching each bracket (2) to the magnet mount chassis (PLO-0RU-UMC-2LGX) using two .5-inch carriage bolts, washers and hex nuts.
- Place the assembled kit and mag mount chassis into the desired mounting location, extend the brackets to the mounting points, and snug down the hex nuts.
- Once in the desired location, align the mounting holes with the pedestal post mounting slots and attach the assembled bracket kit and magnet mount to the posts using the included 1-inch carriage bolts, flat washers, and M6 hex head bolts. Ensure all hex head bolts are tight to bracket and post as well as to the magnet mount chassis.
- If there are no existing mounting holes, ensure that the assembled kit is level and mark each post to be drilled. Once marked, drill four .25-inch holes in the mounting posts and attach the assembled bracket kit and magnet mount to the posts using the included 1-inch carriage bolts, flat washers, and M6 hex head bolts. Ensure all hex head bolts are tight to bracket and post as well as to the magnet mount chassis.



## SPECIFICATIONS

TECHNICAL SPECIFICATIONS		
DESCRIPTION	UNITS	SPECIFICATION
HEIGHT	in (mm)	2.6 (66)
WIDTH	in (mm)	13 (330.2)
DEPTH	in (mm)	1.6 (40.6)
MATERIAL	--	.118 GALVANEAL STEEL
FINISH	--	POWDER COAT
COLOR	--	BLACK
OPERATING TEMPERATURE	°C	-40 ~ +85
STORAGE TEMPERATURE	°C	-40 ~ +85

## ORDERING INFORMATION

The table below contains the ordering information for ordering complimentary pedestal hardware offered by Plugin Optics. If you have any questions, feel free to call the support number listed above or email us at [cx@pluginoptics.com](mailto:cx@pluginoptics.com) for more information.

ORDERING INFORMATION	
PART NUMBER	DESCRIPTION
PLO-U-MMPED-KIT	ADJUSTABLE 2-POST PEDESTAL BRACKET KIT FOR MAG MOUNT
PLO-0RU-UMC-2LGX	UNIVERSAL MAGNET MOUNT, 0RU, 2 LGX SLOTS, WALL OR MAGNET MOUNTED

NOTE: PLUGIN OPTICS OFFERS A FULL LINE OF HARDWARE TO DEPLOY WITH UNIVERSAL DISTRIBUTION PEDESTALS.

## INSTALLATION SUPPORT

If you encounter issues, please contact us via phone or email. Alternately, you can use the camera on your smartphone to scan the QR code below to review the latest product specs and applications or submit a contact ticket for support.

### Plugin Optics Customer Support

Tel: +1 (561) 612-5703

Email: [cx@pluginoptics.com](mailto:cx@pluginoptics.com)



Install Support

