

Universal Mounting and Grounding Plates

UMP-1552

- Durable 16 Gauge Aluminum
- Integrated side cleats and strain relief T's for cable tie down
- Flexible hole pattern for optical module and splice tray placement

UGB-300-L


- 14 Gauge Stainless Steel
- Aluminum-Tin Plated Lug for #14 - #2 AWG termination
- 3 Post Ground Bar with 3/8 washer nuts

Applications

- Pedestal and Customer Premise
- FTTx, xWDM and Fiber Interconnect


UMP-1552

The UMP-1552 “Universal Mounting Plate” provides an excellent, low-cost deployment solution for pedestal manufacturers and fiber network operators. The plate attaches easily to pedestal stakes and customer premise wall boards and provides flexibility for splice tray, PLC Splitter, xWDM and Fiber Interconnect placement. The integrated side cleats and strain relief T’s allow technicians to easily tie down and route fiber cables to meet bend radius requirements.

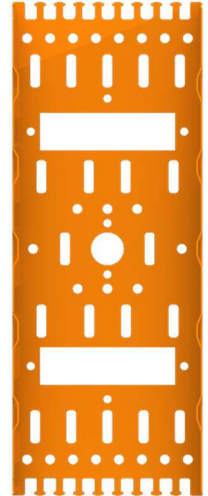

UGB-300-L

The UGB-300-L “Universal Grounding Bracket” provides an excellent, low-cost grounding and bonding solution. The plate has an integrated Lug that accommodates #14 - #2 AWG and three posts with corresponding washer nuts for flexible ground wire and eyelet terminations.

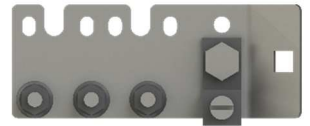

Technical Specifications		
Parameters	PLOU-UMP-1552	PLOU-UGB-300-L
Dimensions LxWxD (inches)	15 x 5.5 x 1.5	4 x 1.5 x 0.078
Material	Aluminum	Stainless Steel-Tin Plated Aluminum
Ordering Information		
Part Number	Description	
PLO-UMP-1552	Universal Mounting Plate, Pedestal and CPE	
PLO-UGB-300-L	Universal Grounding Bracket, Pedestal and CPE	