

UGB-300-L, UNIVERSAL GROUNDING BRACKET

OVERVIEW


The UGB-300-L “Universal Grounding Bracket” provides an excellent, low-cost grounding and bonding solution. The plate has an integrated Lug that accommodates #14 - #2 AWG and three posts with corresponding washer nuts for flexible ground wire and eyelet terminations.

FEATURES

- 14 Gauge Stainless Steel
- Integrated Lug Supports #2 to #14 AWG Copper Grounding.
- 3 Captivated Studs With Corresponding Washer Nuts.
- Slots for C-Service Wire Connectors.

APPLICATIONS

- Pedestal and Customer Premise
- FTTx, xWDM and Fiber Interconnect
- Fiber-To-The-Home, FTTH
- Fiber-To-The-Tower, FTTT

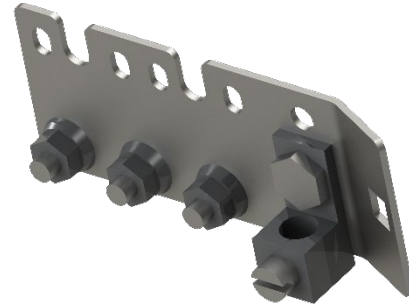

TECHNICAL SPECIFICATIONS

DESCRIPTION	UNITS	SPECIFICATION
MATERIAL (BRACKET)	--	14 GA STAINLESS STEEL
MATERIAL (GROUND LUG)	--	TIN PLATED ALUMINUM
DIMENSIONS	in	4 x 1.5 x 0.75
DIMENSIONS	mm	101.6 x 38.1.1 x 19.05
OPERATING TEMPERATURE	°C	-40 ~ +85
STORAGE TEMPERATURE	°C	-40 ~ +85

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PLO-UGB-300-L	UNIVERSAL GROUNDING BRACKET, PEDESTAL AND CPE
NOTE: PLUGIN OPTICS OFFERS A FULL LINE OF HARDWARE AND CONNECTIVITY SOLUTIONS.	