

## UMP-1552, UNIVERSAL MOUNTING PLATE

### OVERVIEW


The UMP-1552 “Universal Mounting Plate” provides an excellent, low-cost deployment solution for pedestal manufacturers and fiber network operators. The plate attaches easily to pedestal stakes and customer premise wall boards and provides flexibility for splice tray, PLC Splitter, xWDM and Fiber Interconnect placement. The integrated side cleats and strain relief T’s allow technicians to easily tie down and route fiber cables to meet bend radius requirements.

#### FEATURES

- Durable 16 Gauge Aluminum
- Integrated Side Cleats and Strain Relief T’s for Cable Tie Down
- Flexible Backplane Hole Pattern for LGX, USBM and Splice Tray Placement
- Mounting Side: Flexible Attachment Slots
- Access Side: Long Wider Slots for Tool Access

#### APPLICATIONS

- Pedestals, Customer Premise
- Midspan Splice and Distribution Points
- Fiber-To-The-Home, FTTH
- Fiber-To-The-Tower, FTTT

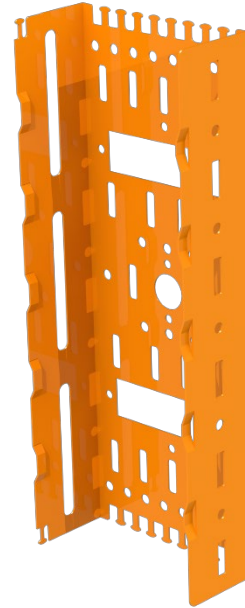

### TECHNICAL SPECIFICATIONS

DESCRIPTION	UNITS	SPECIFICATION
MATERIAL	--	16 GAUGE ALUMINUM
DIMENSIONS	IN	15 x 5.75 x 2.5
DIMENSIONS	MM	381 x 146.1 x 63.5
OPERATING TEMPERATURE	°C	-40 ~ +85
STORAGE TEMPERATURE	°C	-40 ~ +85

### ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PLO-UMP-1552	UNIVERSAL MOUNTING PLATE, PEDESTAL AND CPE
NOTE: PLUGIN OPTICS OFFERS A FULL LINE OF HARDWARE AND CONNECTIVITY SOLUTIONS.	