

UMP-1552 & UMP-1752, UNIVERSAL MOUNTING PLATES

OVERVIEW



The Plugin Optics line of “Universal Mounting Plates” provide excellent, low-cost deployment solutions for pedestal manufacturers and fiber network operators. The plate attaches easily to pedestal stakes and customer premise wall boards and provides flexibility for splice tray, PLC Splitter, xWDM and Fiber Interconnect placement. The integrated side cleats and strain relief T’s allow technicians to easily tie down and route fiber cables to meet bend radius requirements.

FEATURES

- Universal “mount anywhere” Design
- Integrated Side Cleats and Strain Relief T’s for Cable Tie Down
- Flexible Backplane Hole Pattern for LGX, USBM and Splice Tray Placement
- Mounting Side: Flexible Attachment Slots
- Access Side: Long Wider Slots for Tool Access

APPLICATIONS

- Pedestals, Customer Premise
- Midspan Splice and Distribution Points
- Fiber-To-The-Home, FTTH
- Fiber-To-The-Tower, FTTT

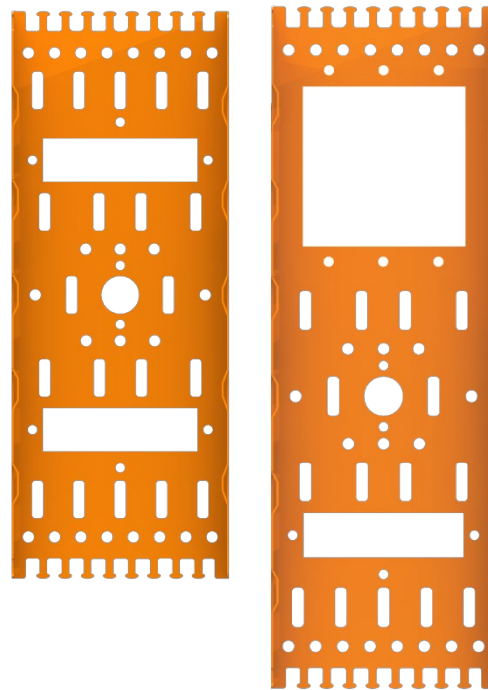

TECHNICAL SPECIFICATIONS

DESCRIPTION	UNITS	SPECIFICATION	
		UMP-1552	UMP-1752
PANEL	--		
MATERIAL	--	16GA Aluminum	2mm Stainless
DIMENSIONS	IN	15 x 5.75 x 2.5	17 x 5.75 x 2.5
	MM	381 x 146.1 x 63.5	431.8 x 146.1 x 63.5
LGX SLOTS	EA	2	4
OPERATING TEMPERATURE	°C	-40 ~ +85	
STORAGE TEMPERATURE	°C	-40 ~ +85	

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PLO-UMP-1552	15-Inch UNIVERSAL MOUNTING PLATE, 2LGX SLOT< PEDESTAL AND CPE
PLO-UMP-1752	17-Inch UNIVERSAL MOUNTING PLATE, 4 LGX SLOT, PEDESTAL AND CPE

NOTE: PLUGIN OPTICS OFFERS A FULL LINE OF HARDWARE AND CONNECTIVITY SOLUTIONS.