


LGX BULKHEAD FACEPLATES

OVERVIEW

LGX Bulkhead Faceplates are an ideal solution for adding fiber connection points to splice in, cross-connect, and customer demarcation locations. Single mode, 12 port and 24 port variants are standard, but they can be ordered in a variety of connector types, counts, and fiber types. These carrier grade LGX faceplates can be deployed in Plugin LGX chassis or other industry standard LGX compatible mounting solutions.

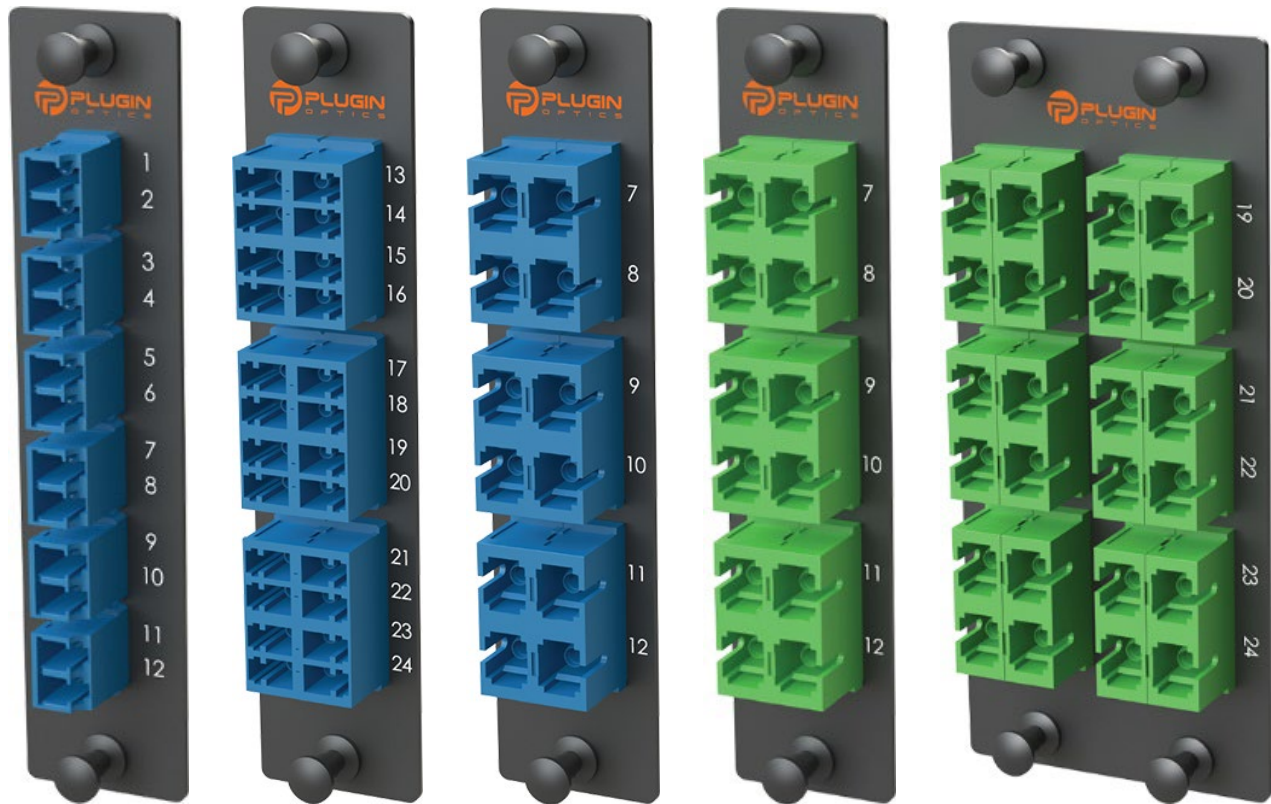

FEATURES

- 12-Port & 24-Port Variants
- LGX Mounting
- SC-UPC, SC-APC & LC-UPC
- Indoor or Outdoor Use
- Temp Range: I-Temp

ENVIRONMENT

- Central Office
- Head End
- Remote Site
- Cabinet
- Pedestal

CONFIGURATIONS

- Customer Premise Demarc
- Fiber Distribution Panels
- Fiber-To-The-Home
- Fiber-To-The-Tower

TECHNICAL SPECIFICATIONS

DESCRIPTION	UNIT	SPECIFICATION	
FIBER	COUNT	1 x 12 or 2 x 12	
CONNECTOR TYPE	SM	LC-UPC, LC-APC, SC-UPC, or SC-APC	
LGX TYPE	WIDTH	1-WIDE	2-WIDE
DIMENSIONS (H X W): FACEPLATE	mm	28.8 x 130	59 x 130
OPERATING/STORAGE TEMPERATURE	°C	-40 ~ +85	

ORDERING INFORMATION

PART NUMBER	DESCRIPTION
PLO-12LGX-BLKFP-LCU	12 PORT LGX BULKHEAD FACEPLATE, 1-WIDE, LC-UPC
PLO-24LGX-BLKFP-LCU	24 PORT LGX BULKHEAD FACEPLATE, 1-WIDE, LC-UPC
PLO-12LGX-BLKFP-SCU	12 PORT LGX BULKHEAD FACEPLATE, 1-WIDE, SC-UPC
PLO-12LGX-BLKFP-SCA	12 PORT LGX BULKHEAD FACEPLATE, 1-WIDE, SC-APC
PLO-24LGX-BLKFP-SCA	24 PORT LGX BULKHEAD FACEPLATE, 2-WIDE, SC-APC

NOTE: PLUGIN OPTICS OFFERS A COMPLETE LINE OF COMPLIMENTARY LGX MOUNTING SOLUTIONS TO USE WITH LGX BULKHEAD MODULES. CUSTOM MODULES AVAILABLE UPON REQUEST.

