

8 Channel DWDM + 1310nm Wideband, LGX

Features

- Capacity Gain: 9 to 1
- Monitor Port: 2%
- Expandable to 40ch
- 5 Variants: ITU Ch 20-59
- Technology: DWDM + 1310
- Configuration: Mux/Demux+
- Form Factor: LGX
- Temp Range: I-Temp

Topologies

- Point to point
- Linear Chain
- Collapsed/Diverse Ring

Deployment


- Central Office, Head End, Data Center
- Pedestal, Cabinet, MDU

Overview

The 8 channel DWDM + 1310nm filter and Expansion port provides a solid capacity solution for modern fiber networks. This LGX module combines 8 ITU standard DWDM wavelengths and a wideband 1310nm port to allow the overlay of legacy 1310nm circuits or the next evolution of 100G circuits. The included Expansion port provides additional growth up to 40 DWDM channels without interrupting the initially deployed circuits.

DWDM capacity solutions are passive and require no power, or configuration. DWDM filters are used to allow the combination (Multiplexing) and separation (Demultiplexing) of multiple wavelengths over single mode fiber and provide a high quality, low loss, fiber capacity solution.

Plugin Optics LGX mounting solutions support controlled environment and I-Temp deployments.

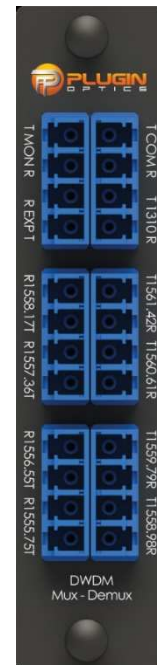

PLO-L2DT-B9C1-LC



Technical Specifications				
Parameter	Unit		Specification	
Number of Channels	CH		8 DWDM, 1310nm	
Operating Wavelength	nm		1260-1360, 1520-1570	
DWDM Channel Spacing	GHz		100	
Passband: 1310 Channel	nm		1260-1360	
Passband: Expansion Port	nm		1520-1570	
Passband: DWDM Channels	nm		ITU \pm .11	
Insertion Loss Including Connectors			Demux	Mux
1310nm Loss, COM to 1310	Max.	dB	1.4	1.4
Expansion Port, EXP to COM	Max.	dB	3.2	3.2
DWDM Channels Loss	Max.	dB	3.4	3.4
Monitor	Max.	dB	19	22.3
Adjacent and 1310 channel Isolation	Max.	dB	30	
Non-Adjacent channel Isolation	Max.	dB	40	
Pass Band Ripple / DWDM	Max.	dB	0.5	
PDL /DWDM	Max.	dB	0.2	
PMD	Max.	ps	0.2	
Directivity	Min.	dB	50	
Return Loss	Min.	dB	45	
Power Handling	Max.	mW	300	
Dimensions (H x W): Faceplate	mm		28.8 x 130	
Dimensions (H x W x D): LGX Box	mm		28.8 x 100 x 76.2	
Dimensions: Nylatch Spacing	mm		118	
Operating Temperature	°C		-40 ~ +85	
Storage Temperature	°C		-40 ~ +85	
Fiber Type	/		SMF 28	
Connector type	/		LC/UPC	

Ordering Information	
Part Number	Description
PLO-L2DT-B9C1-LC	LGX, 8 Channel DWDM +1310 +Exp, Mux-Demux, ITIU C21-C27, 1561.42 - 1555.75, 2% Monitor, LC-UPC
PLO-L2DT-B9C2-LC	LGX, 8 Channel DWDM +1310 +Exp, Mux-Demux, ITU C28-C35, 1554.94 - 1549.32, 2% Monitor, LC-UPC
PLO-L2DT-B9C3-LC	LGX, 8 Channel DWDM +1310 +Exp, Mux-Demux, ITU C36-C43, 1548.51 - 1542.94, 2% Monitor, LC-UPC
PLO-L2DT-B9C4-LC	LGX, 8 Channel DWDM +1310 +Exp, Mux-Demux, ITU C44-51, 1542.14 - 1536.61, 2% Monitor, LC-UPC
PLO-L2DT-B9C5-LC	LGX, 8 Channel DWDM +1310 +Exp, Mux-Demux, ITU C52-C59, 1535.82 - 1530.33, 2% Monitor, LC-UPC

Note: See Plugin Optics LGX Mounting solutions below.

LGX Mounting Chassis

Features

UMM-20

- 2 LGX slots
- Magnet or Wall Mount

UMS-30

- 1RU, 3 LGX slots
- 19" or 23" racks
- Integrated fiber management

UMS-140

- 3RU- 14 LGX slots
- 19" or 23" racks
- Integrated fiber management

PlugIn Optics offers carrier grade, cost effective mounting solutions for LGX module deployments.

UMM-20 "Universal Magnet Mount"

Part#: PLO-0RU-UMC-2LGX

Designed for rack space limited deployments, for example pedestals, cabinets or MDU environments where rack space may not be available. The UMM-20 can be magnet mounted to the steel walls or screwed directly into a wall board. This chassis will hold two LGX modules.



UMS-30 "Universal Mounting Shelf"

Part#: PLO-1RU-LMC-3LGX

Designed for 1RU rack deployments, for example Central Office, Head End, Data Center, Cabinet and MDU. The UMS-30 has reversible mounting brackets and can be mounted in 19" or 23" racks. The chassis has integrated fiber management and will hold three LGX modules.



UMS-140 "Universal Mounting Shelf"

Part#: PLO-3RU-LMC-14LGX

Designed for 3RU deployments, for example Central Office, Head End and Data Center. The UMS-140 has reversible mounting brackets and can be mounted in 19" or 23" racks. The chassis has integrated fiber management and will hold fourteen LGX modules.

